


# TECHNICAL SPECIFICATION



SIDE ELEVATION

FRONT ELEVATION

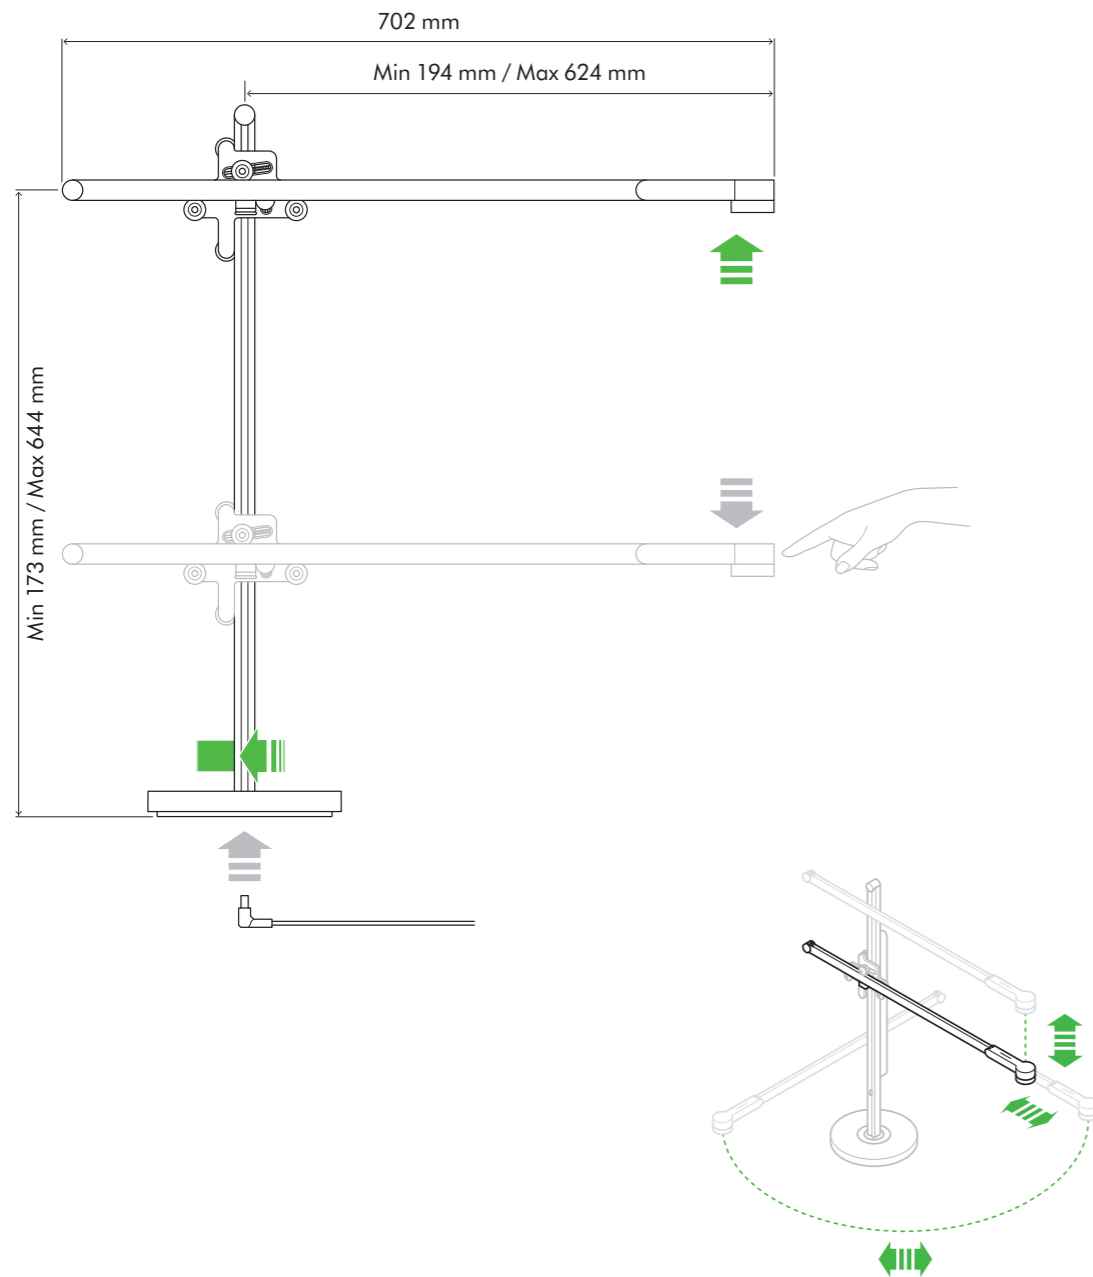

**Dimensions with arm not extended**

Height 703 mm Width 702 mm Depth 190 mm

**Electrical**

Input voltage / Frequency: 100-240V 50/60Hz  
Rated power: 10W  
Power supply cord length: 3.2m  
Electrical class: Class III

**Optical**

Light source: LED  
Light output: 916lm  
Light output ratio: 92.1%  
Luminous efficacy: 92lm/w  
LED life time: 181,000 hours<sup>1</sup>  
Colour temperature: 3500K  
CRI: 90 MIN  
R9: 59 MIN  
Standby power consumption: <0.5W  
Beam angle: 65.5 degrees  
IP rating: Indoor use only  
Operating temperature range: 0°-40°C, 32°-104°F  
Flicker: <1%  
Average lux level at full height, extension and max output (at 630 mm over 800 mm diameter area): 1209lx

**Construction**

Materials: Aluminium / Copper / Steel / Polycarbonate Plastic

**Operation**

Precision dimming

**Logistics**

Net weight: 4.09kg  
Packaged weight: 5.65kg  
Packaged dimensions: 282.5 mm (L) x 99.5 mm (W) x 809 mm (H)


**Accreditation**

Complies with:  
UL 153  
CSA C22.2#250.4  
IEC/EN 60598-1, IEC/EN 60598-2-4  
AS/NZS 60598.1, AS/NZS 60598.2.4  
GB 7000.1; GB7000.204; GB4943.1  
IEC 60598-1, IEC 60598-2-4  
IEC60598-1, IEC 60598-2-4

**Standard guarantee**

5 years parts and labour

**Polar plot**

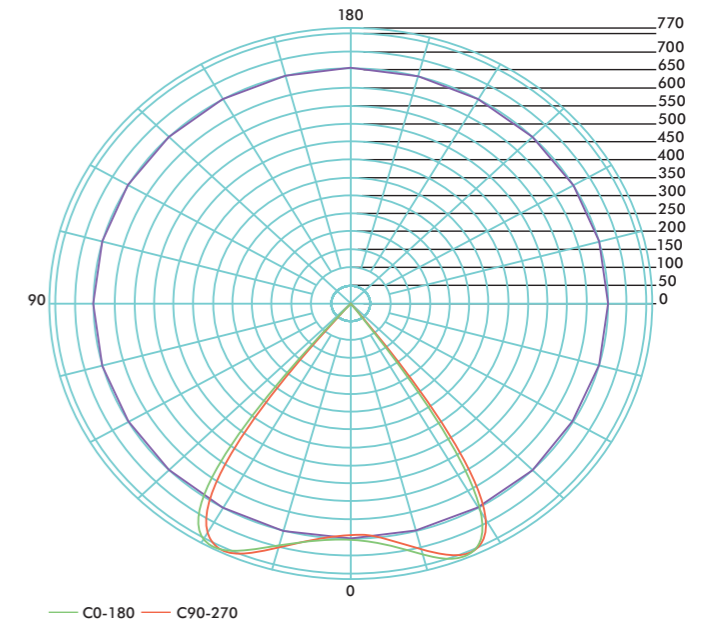

**Product range**

White/Silver

Black/Black



<sup>1</sup>LED-life calculation is based on L70 measurement according to IEC, with an estimation of 8 hours' usage per day. Real-life results may vary. The Bluetooth® word mark and logos are registered trade marks owned by the Bluetooth SIG, Inc. and any use of such marks by Dyson is under license.