


TECHNICAL SPECIFICATION



FRONT ELEVATION

SIDE ELEVATION

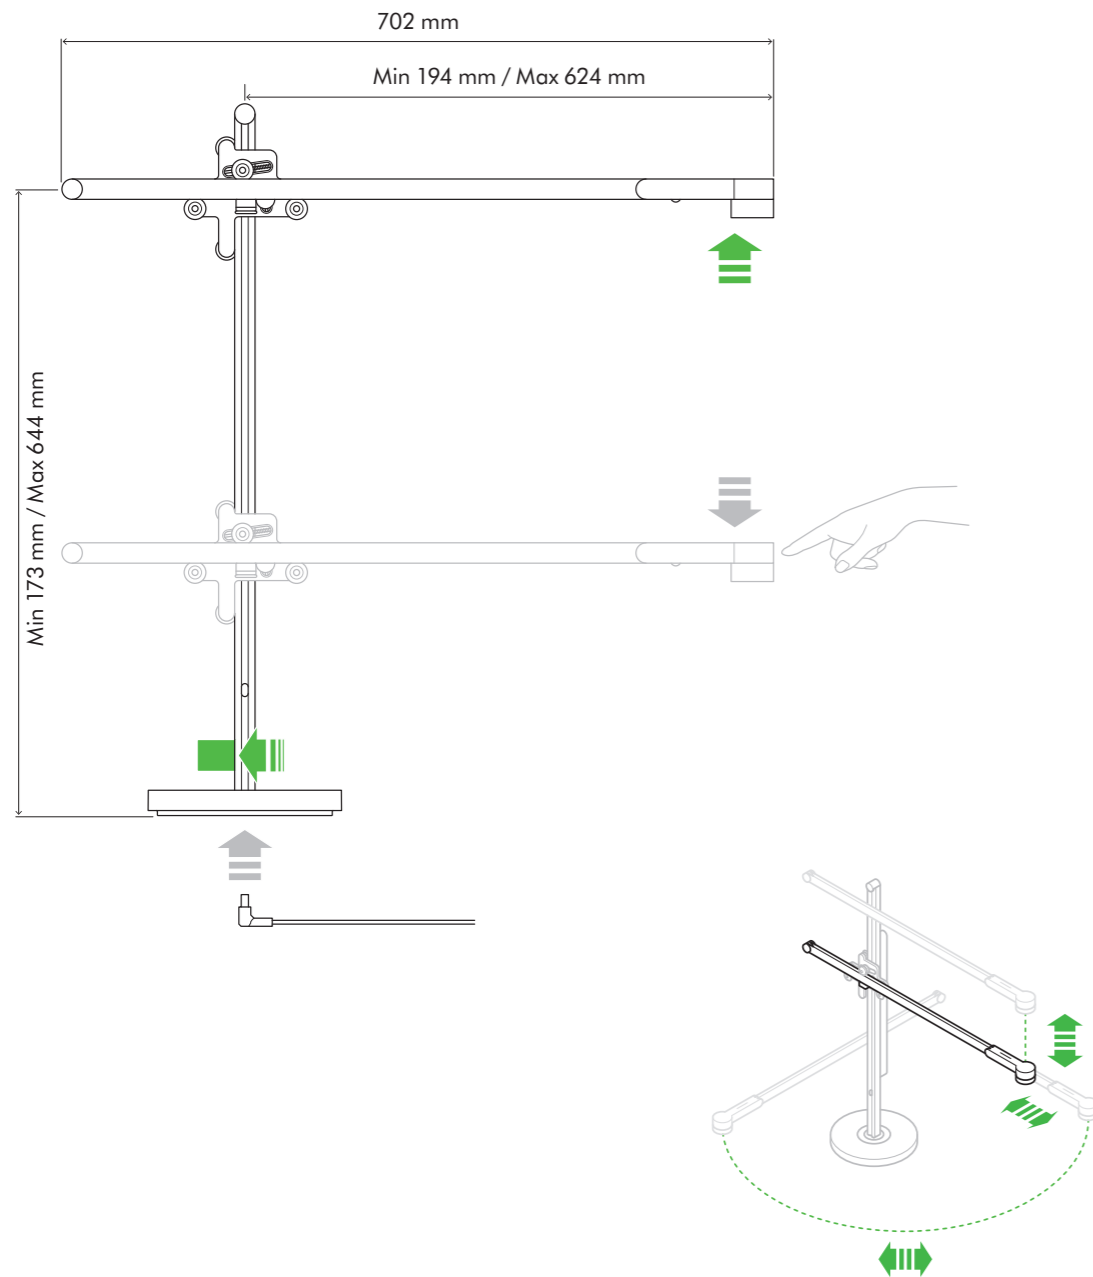

Dimensions with arm not extended

Height 703 mm Width 702 mm Depth 190 mm

Electrical

Input voltage / Frequency: 100-240V 50/60Hz
 Rated power: 15.8W
 Power supply cord length: 3.2m
 Electrical class: Class III

Optical

Light source: LED
 Light output: 1120lm
 Light output ratio: 82.1%
 Luminous efficacy: 71lm/w
 LED life time: 181,000 hours¹
 Colour temperature: 2700K – 6500K
 CRI: 90 MIN
 R9: 48 MIN
 Standby power consumption: <0.5W
 Beam angle: 78 degrees
 IP rating: Indoor use only
 Operating temperature range: 0°-40°C, 32°- 104°F
 Flicker: <1%
 Average lux level at full height, extension and max output (at 630 mm over 800 mm diameter area): 1194lx

Features

USB-C charging point: 1.5A at 5V
 Bluetooth® wireless technology

Construction

Materials: Aluminium / Copper / Steel / Polycarbonate Plastic

Operation

Precision dimming

Logistics

Net weight: 4.09kg
 Packaged weight: 5.65kg
 Packaged dimensions: 282.5 mm (L) x 99.5 mm (W) x 809 mm (H)


Accreditation

Complies with
 UL 153
 CSA C22.2#250.4
 IEC/EN 60598-1, IEC/EN 60598-2-4
 AS/NZS 60598.1, AS/NZS 60598.2.4
 GB 7000.1; GB7000.204; GB4943.1
 IEC 60598-1, IEC 60598-2-4
 IEC60598-1, IEC 60598-2-4

Standard guarantee

5 years parts and labour

Polar plot

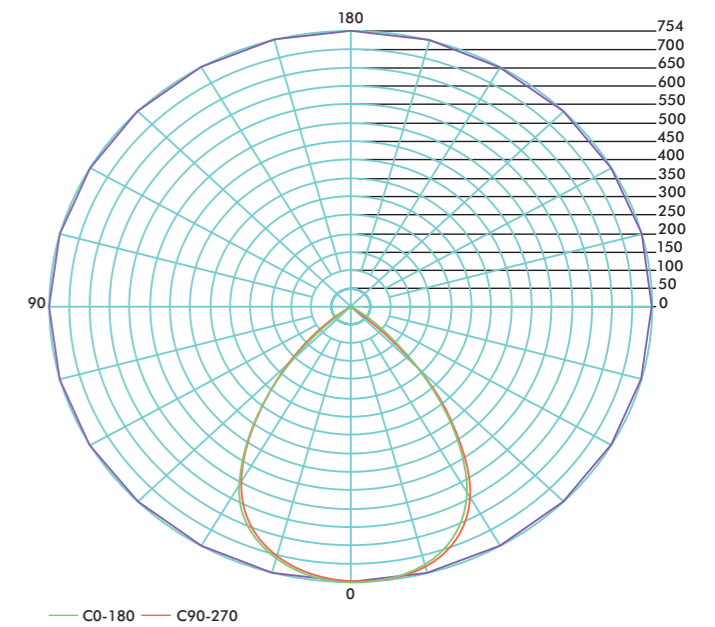

Product range

White/Silver

Black/Black



¹LED-life calculation is based on L70 measurement according to IEC, with an estimation of 8 hours' usage per day. Real-life results may vary.