


Technical specification

HU
03




Front elevation

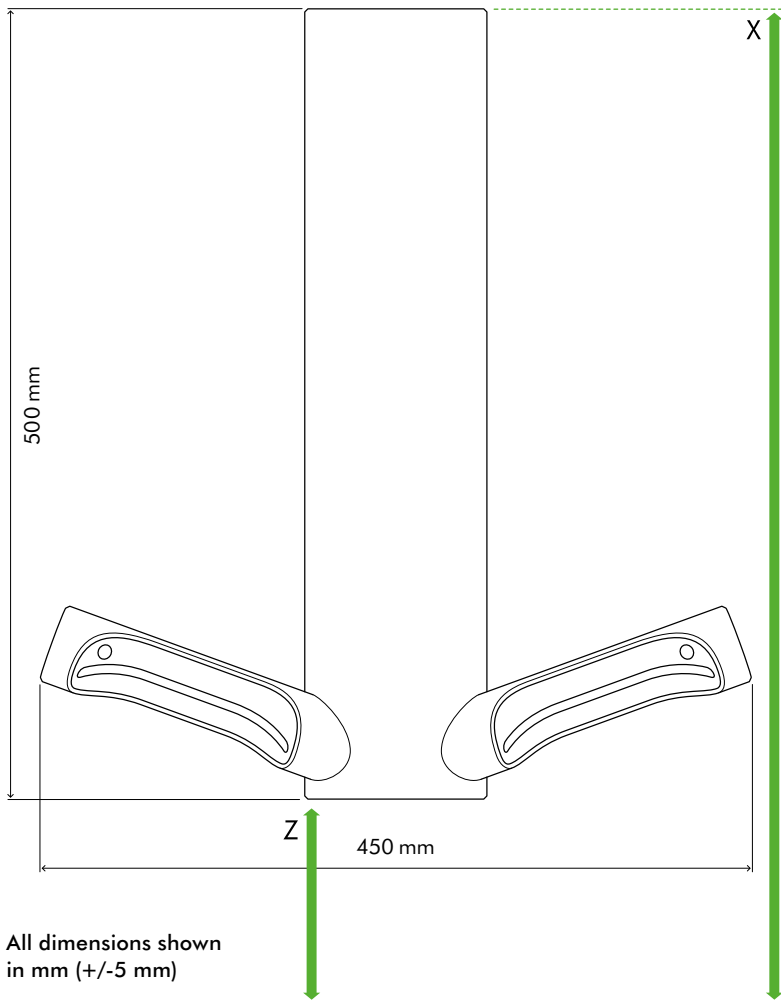


All dimensions shown in mm (+/-5 mm)

Side elevation

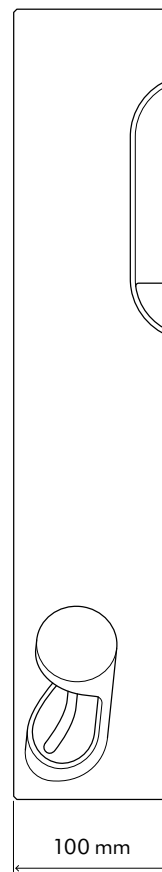

Back plate

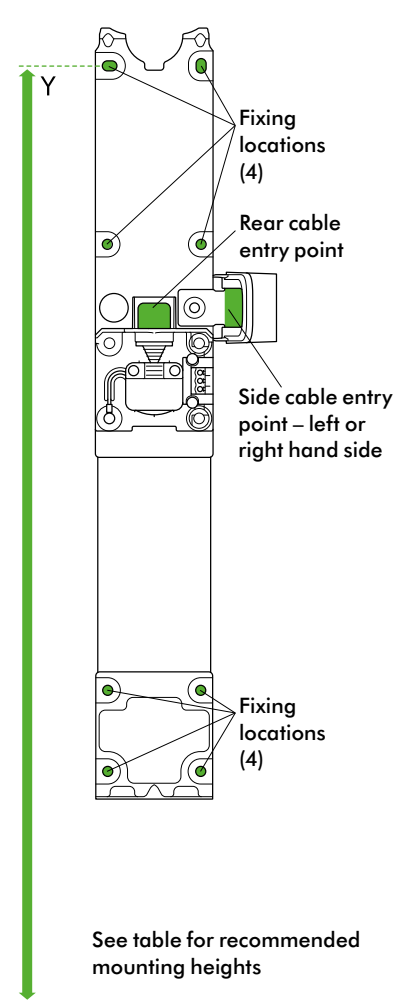

See table for recommended mounting heights

FLOOR

Recommended installation heights from floor

| | | | |
|-----------------|-----------|-----------|----------|
| Male | X 1489 mm | Y 1451 mm | Z 989 mm |
| Female | X 1454 mm | Y 1416 mm | Z 954 mm |
| Wheelchair user | X 1245 mm | Y 1207 mm | Z 745 mm |
| Child 5-8 | X 1117 mm | Y 1079 mm | Z 617 mm |
| Child 8-11 | X 1217 mm | Y 1179 mm | Z 717 mm |
| Child 11-14 | X 1294 mm | Y 1256 mm | Z 794 mm |

Machine dimensions

Height 500 mm Width 450 mm Depth 100 mm

Minimum clearance

210 mm above machine

Rear cable entry point from floor

| | |
|-----------------|---------|
| Male | 1293 mm |
| Female | 1258 mm |
| Wheelchair user | 1049 mm |
| Child 5-8 | 921 mm |
| Child 8-11 | 1021 mm |
| Child 11-14 | 1098 mm |

For further information please contact Dyson
ask@dyson.in

HU
O3

Electrical

Input voltage/Frequency: 160-253 V 50-60 Hz

Standby power consumption: Less than 0.5 W

Motor specification: 900 W (MAX) mode / 650 W (ECO) mode
digital brushless motor

Heater type: None

Construction

Fascia: Stainless steel – Brushed (304L)

Backplate mounting bracket: Stainless steel

Exterior screw type: Anti-tamper 5 mm torx plus

Water ingress protection to IP24

Filter

HEPA filter (Glass fibre and fleece prelayer)

Captures up to 99.95% of particles¹, as small as 0.1 microns.

Operation

Touch free time of flight sensor activation

Hand dry time measurement: 10 seconds (MAX) mode / 12 seconds (ECO) mode (measurement based on NSF Protocol P.335)

Sound power level: 79 dB(A) (MAX) mode / 77 dB(A) (ECO) mode

Operation lock-out period: 30 seconds

Airspeed at aperture: 624 km/h / 388 mph

Maximum altitude: 3,000 metres / 9,842 ft

Logistics

Net weight: 4.5 kg / 9.9 lbs

Packaged weight: 7.6 kg / 16.8 lbs

Packaged dimensions:

(H) 129 x (W) 520 x (D) 616 mm / (H) 5.1" x (W) 20.5" x (D) 24.3"

Standard warranty

5 year parts (self-service)



Dyson backplate

Where only unsupported plasterboard is available for installation, a Dyson backplate must be used. The Dyson backplate helps protect the wall from water damage and can be used to cover holes/marks left from previously installed products – including the Dyson Airblade dB hand dryer. Contact the Dyson Helpline or www.dyson.com for further information.

WELL Building Standard™

Dyson Airblade™ hand dryers contribute towards satisfying Feature W08 under the WELL Building Standard™



For further information please contact Dyson
ask@dyson.in

The Carbon label is a trademark of the Carbon Trust.

Quiet Mark is a registered trademark of the Noise Abatement Society. International WELL Building Institute™ and the related logo are trademarks used with permission from the International WELL Building Institute.™

¹HEPA filter tested to EN1822-5, by an independent testing laboratory, under prescribed test conditions.