




DYSON BACKPLATE TECHNICAL SPECIFICATION

HU
03

FRONT ELEVATION

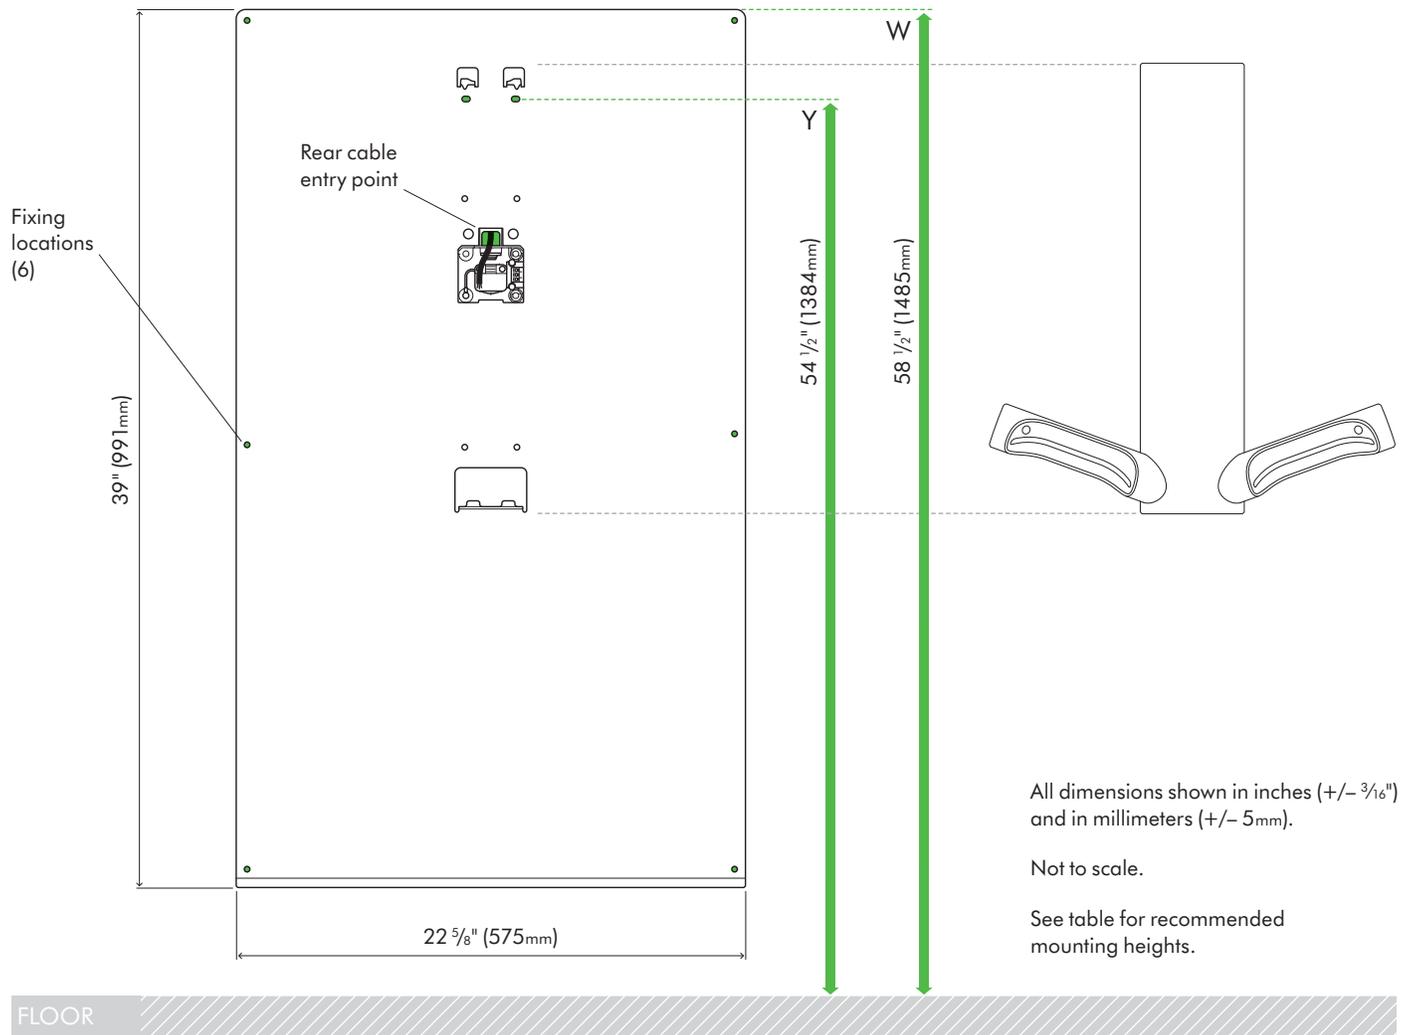

All dimensions shown in inches (+/- 3/16") and in millimeters (+/- 5mm).

Not to scale.

See table for recommended mounting heights.

Dyson backplate dimensions

Height 39" (991mm) × Width 22 5/8" (575mm) × Depth 3/16" (5mm)

Minimum clearance

8 1/4" (210mm) above machine.

Recommended installation heights from floor

Adult 54 1/2" (1384mm)

Wheelchair/child 55 3/4" (1416mm)

Rear cable entry point from floor

Adult 48 1/4" (1226mm)

Wheelchair/child 49 1/2" (1258mm)

Installing the Dyson backplate

Where only unsupported plasterboard is available for installation, a Dyson backplate must be used. Fixing to unsupported plasterboard (drywall) without the aid of a Dyson backplate will not result in safe and secure installation for your machine, and may also invalidate your warranty.

If the wall you are fixing the machine to has an airgap, the fixings used must be of a sufficient length to provide a secure installation. Do not use sealant when attaching the machine to the wall.

The Dyson backplate helps protect the wall from water damage and can be used to cover holes/marks left from previously installed products.

Contact the Dyson Helpline for further information.

Construction

Stainless steel (brushed)

Back plate mounting bracket: Stainless steel – Brushed (304L)

Logistics

Net weight: 6.7kg / 14.7lbs

Packaged weight: 11.10kg / 24.47lbs

Packaged dimensions:

Height: 2 3/4" (71mm) × Width: 26 1/4" (664mm) × Depth: 51" (1295mm)

Standard warranty

5 year parts and limited labor warranty

